

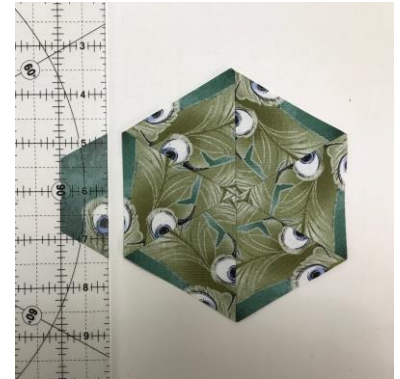
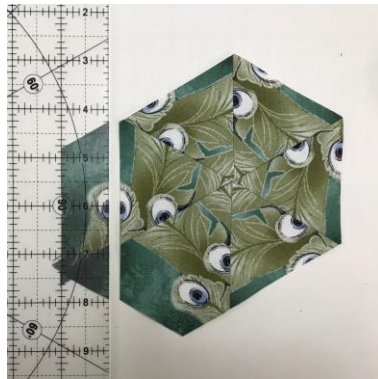
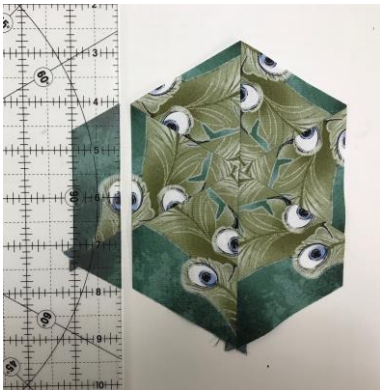
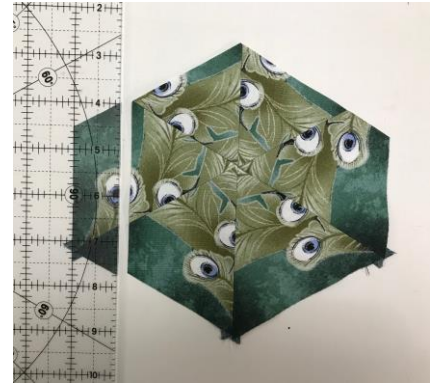


Appliquing Hexies: From leftover hexies stitch the two halves together, press the seam open. Use the whole hexie or trim to your desired size. Below I trimmed 1" off every side.

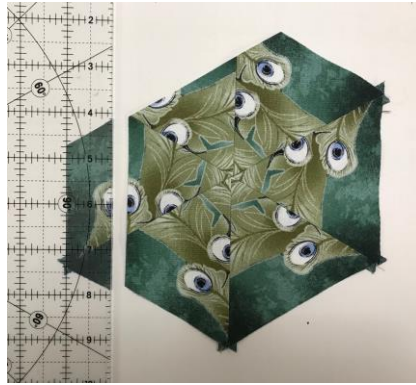

Use a Fusible Knit Interfacing, cut a square slightly larger than the hexagon. Place the bumpy side of the interfacing with the right side of the hexagon. Stitch around the hexagon using a 1/4" seam allowance. Trim off the excess interfacing and snip a hole about 1" wide.

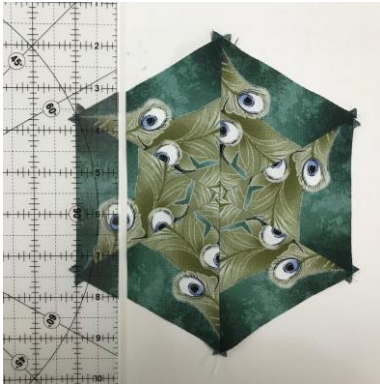

18. Turn the hexagon right side out. Now the fusible 'bumpy' side is on the outside. Finger press the edges to flatten it out. This is a great way to get perfect seam allowance on an edge.